

HD

PINZA PER LEGNA LOG GRAPPLE



Pinza per legna

CARATTERISTICHE

- La nostra pinza rigida più resistente, progettata per il sollevamento dei carichi più pesanti e impegnativi.
- 1 linea idraulica a doppio effetto.
- Valvola di blocco e di massima integrata su tutte le pinze.
- Doppio cilindro (tranne che nei modelli HD15 e HD20).
- * Disponibile con punte aperte o con punte chiuse.
- Predisposta per applicazioni su gruppi sega.
- Piastre d'acciaio più spesse e piastra rotante più grande.

Su richiesta:

- sella di attacco, disponibile su misura;
- fornitura di tubi;
- disponibili rotatori oscillanti e fissi.

Log grapple

FEATURES


- Our strongest stiffed grapple, designed for lifting the heaviest and most demanding loads.
- 1 "two-way flow" hydraulic circuit.
- Integrated lock and relief valve on all grapples.
- Double cylinder (not on the models HD15 and HD20).
- * Available with open or closed tips.
- Prepared for saw unit applications.
- Thicker steel plates and larger rotating plate.

Upon request:

- custom-made mounting bracket;
- hoses;
- swinging and fixed rotators available.

DATI TECNICI

DATA SHEET

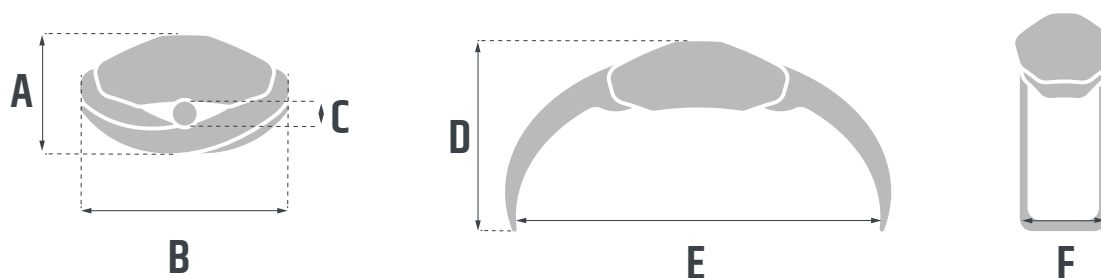

	HD15	HD20	HD25	HD28	HD35	HD40	HD50	HD55
	3 - 5 tons	3 - 5 tons	6 - 8 tons	8 - 10 tons	8 - 14 tons	12 - 18 tons	12 - 20 tons	16 - 24 tons
	150 Kg 330 lbs	160 Kg 353 lbs	250 Kg 551 lbs	260 Kg 573 lbs	285 Kg 628 lbs	320 Kg 705 lbs	340 Kg 750 lbs	365 Kg 805 lbs
CAPACITÀ CAPACITY	0,15 M ³	0,20 M ³	0,25 M ³	0,28 M ³	0,35 M ³	0,40 M ³	0,50 M ³	0,55 M ³
CARICO MAX. MAX. LOAD	2000 kg 4409 lbs	2000 kg 4409 lbs	3500 kg 7716 lbs	3500 kg 7716 lbs	5000 kg 11023 lbs	5000 kg 11023 lbs	5000 kg 11023 lbs	5000 kg 11023 lbs
 MAX	MAX 230 bar 3336 psi	MAX 230 bar 3336 psi	MAX 230 bar 3336 psi	MAX 230 bar 3336 psi	MAX 230 bar 3336 psi	MAX 230 bar 3336 psi	MAX 230 bar 3336 psi	MAX 230 bar 3336 psi
A	510 mm 20.1"	510 mm 20.1"	540 mm 21.3"	530 mm 20.9"	565 mm 22.2"	610 mm 24"	615 mm 24.2"	695 mm 27.4"
B	740 mm 29.1"	780 mm 30.7"	800 mm 31.5"	830 mm 32.7"	885 mm 34.8"	970 mm 38.2"	1080 mm 42.5"	1110 mm 43.7"
C	90 mm 3.5"	95 mm 3.7"	110 mm 4.3"	110 mm 4.3"	120 mm 4.7"	140 mm 5.5"	140 mm 5.5"	160 mm 6.3"
D	685 mm 27"	645 mm 25.4"	690 mm 27.2"	635 mm 25"	600 mm 23.6"	630 mm 24.8"	715 mm 28.1"	830 mm 32.7"
E	1170 mm 46.1"	1400 mm 55.1"	1450 mm 57.1"	1690 mm 66.5"	1880 mm 74"	2070 mm 81.5"	2110 mm 83.1"	2390 mm 94.1"
F	355 mm 14"	355 mm 14"	434 mm 17.1"	434 mm 17.1"	472 mm 18.6"	472 mm 18.6"	472 mm 18.6"	472 mm 18.6"

ACCESSORI

ACCESSORIES



Rotatore fisso 360°
360° rotator fixed



Rotatore oscillante 360°
360° rotator swinging