

PFIMX

PINZA PER LEGNA LOG GRAPPLE



Pinza per legna

CARATTERISTICHE

- Creata per raccogliere, selezionare e spostare tronchi e legname di ogni dimensione.
- 1 linea idraulica a doppio effetto.
- Valvola di blocco e di massima integrata su tutte le pinze (escluso il modello 1000R).
- * Disponibile con punte aperte o con punte chiuse.
- La serie "R" è realizzata con rinforzi laterali lungo tutte le chele.
- La serie "HD" oltre i rinforzi laterali lungo le chele presenta anche una struttura con doppia scatola.

Su richiesta:

- sella di attacco, disponibile su misura;
- fornitura di tubi;
- disponibili rotatori fissi.

Log grapple

FEATURES



- Design to collect, pick and move trunks of every sizes.
- 1 "two-way flow" hydraulic circuit.
- Integrated lock and relief valve on all grapples (excluding the 1000R model)
- * Available with open or closed tips.
- The "R" series is manufactured with side reinforcements along all claws.
- The "HD" series, in addition to the side reinforcements along the claws, also features a double-frame design.

Upon request:

- custom-made mounting bracket;
- hoses;
- fixed rotators available.

DATI TECNICI

DATA SHEET

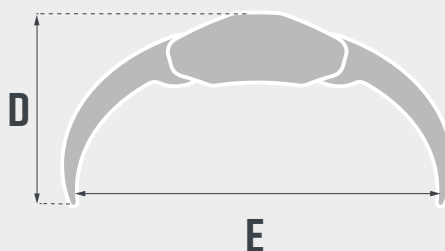

	PFIMX-1000R	PFIMX-1300R	PFIMX-1500R	PFIMX-1400HD	PFIMX-1600HD	PFIMX-1800HD
	1,5 – 2 tons	2 – 3 tons	3 – 5 tons	4 – 7 tons	6 – 9 tons	8 – 13 tons
	70 Kg 154 lbs	118 Kg 260 lbs	138 Kg 304 lbs	124 Kg 273 lbs	228 Kg 503 lbs	260 Kg 573 lbs
CAPACITÀ CAPACITY	0,15 M³	0,20 M³	0,30 M³	0,20 M³	0,30 M³	0,40 M³
CARICO MAX. MAX. LOAD	800 kg 1743 lbs	1500 kg 3306 lbs	2500 kg 5511 lbs	2000 kg 4409 lbs	3000 kg 6613 lbs	4000 kg 8818 lbs
	200 bar 2901 psi	200 bar 2901 psi	200 bar 2901 psi	200 bar 2901 psi	200 bar 2901 psi	200 bar 2901 psi
A	420 mm 16.5"	490 mm 19.3"	590 mm 23.2"	540 mm 21.3"	590 mm 23.2"	660 mm 26"
B	591 mm 23.3"	750 mm 29.5"	860 mm 33.9"	740 mm 29.1"	875 mm 34.4"	1020 mm 40.2"
C	55 mm 2.2"	120 mm 4.7"	130 mm 5.1"	90 mm 3.5"	120 mm 4.7"	100 mm 3.9"
D	595 mm 23.4"	670 mm 26.4"	825 mm 32.5"	630 mm 24.8"	780 mm 30.7"	840 mm 33.1"
E	1000 mm 39.4"	1350 mm 53.1"	1510 mm 59.4"	1435 mm 56.5"	1570 mm 61.8"	1950 mm 76.8"
F	375 mm 14.8"	440 mm 17.3"	490 mm 19.3"	370 mm 14.6"	400 mm 15.7"	480 mm 18.9"

ACCESSORI

ACCESSORIES



Rotatore oscillante 360°
360° rotator swinging